Glo-Ray® *Designer* Infrared Strip Heaters

Models:

GR2A -18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84
GR2AH-18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84

Hatco Glo-Ray® Designer Infrared Strip Heaters safely keep all hot foods at optimum serving temperatures longer. This modern design is ideal for front-of-the-house use. Units are offered in continuous housings, up to 87.5" (2223 mm), are available in Designer colors to match most décors.


Standard features

- Pre-focused heat maintains safe serving temperatures longer without continuing to cook the food
- Sturdy continuous aluminum housings eliminate sagging
- Widths from 21.5" to 87.5" (546 X 2223 mm)
- 14" (356 mm) *Designer* non-adjustable Stands Standard
- Available in a variety of models, configurations, colors and accessories to provide unlimited flexibility
- Designer colors and inset panels allow the unit to match surrounding décor
- Black corner caps and inset panels standard
- Optional sneeze guards
- Remote control installation is required - must chose RMB
- Additional reflector styles and lower wattage elements available, consult factory for more information

Project _____


Item # _____

Quantity _____

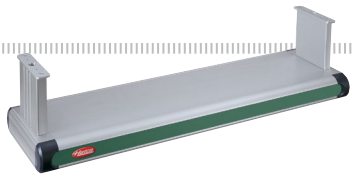

GR2AH-36 with Optional 4" (102 mm) Overhead Mounts and Designer color inset panels (black Corner Caps Standard)

GR2AH-36 with Optional Sneeze Guards and standard 14" (356 mm) Designer Stands, Designer Black color Inset Panels and Corner Caps

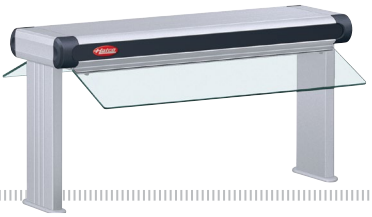

Options (available at time of purchase only)

Designer Color for 9" (229 mm) Housing – Aluminum finish Standard ⊗▪
☐Warm Red ☐Black ☐Gray Granite ☐White Granite
☐Navy Blue ☐Hunter Green ☐Antique Copper

Inset Panel *Designer* Color – Black Standard ⊗▪
☐Warm Red ☐Black ☐Gray Granite ☐White Granite
☐Navy Blue ☐Hunter Green ☐Antique Copper

Corner Caps color, – Black Standard†
☐Dark Gray

☐No Control – requires selection of RMB2-xx control

Remote Box, *Designer* Color – Aluminum finish Standard ⊗▪
☐Warm Red ☐Black ☐Gray Granite ☐White Granite
☐Navy Blue ☐Hunter Green ☐Antique Copper

Sneeze Guards
☐7.5" (191 mm) – One Side ☐7.5" (191 mm) – Two Sides
☐14" (356 mm) – One Side ☐14" (356 mm) – Two Sides

Non-Adjustable Stands – in lieu of Standard 14" (356 mm) Stands
☐ 10" (254 mm) ☐ 12" (305 mm) ☐16" (406 mm)
Designer Color – Aluminum finish Standard ⊗▪
☐Warm Red ☐Black ☐Gray Granite ☐White Granite
☐Navy Blue ☐Hunter Green ☐Antique Copper

☐Overhead Mounts 4" (102 mm) in lieu of Standard 14" (356 mm) Stands
Designer Color – Aluminum finish Standard ⊗▪
☐Warm Red ☐Black ☐Gray Granite ☐White Granite
☐Navy Blue ☐Hunter Green ☐Antique Copper

Extended Electrical Leads
☐1'-5' (305-1525 mm) ☐6'-10' (1829-3048 mm)
☐11'-15' (3352-4572 mm) ☐16'-20' (4877-6096 mm)

⊗ Non-standard color are non-returnable

NOTE: Install Remote Box outside Heat Zone or damage will occur.

▪ **IFS anti-microbial coatings use naturally-occurring, environmentally sustainable, silver ions to help inhibit the growth of microbes on the powder coated surface. See www.hatcocorp.com/antimicrobial-paint for more information.**

For operation, location and safety information, please refer to the Installation and Operating Manual.

c UL us ANSI/NSF 4 CE

MADE IN THE USA


HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350

www.hatcocorp.com | customerservice@hatcocorp.com | Find a Hatco Rep | Image Library | Document Library


Glo-Ray® *Designer* Infrared Strip Heaters

Models: GR2A-18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84
GR2AH -18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84

GR2A and GR2AH

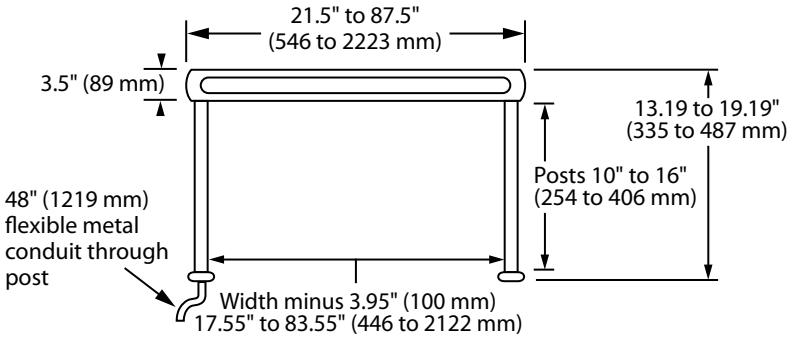

FRONT VIEW

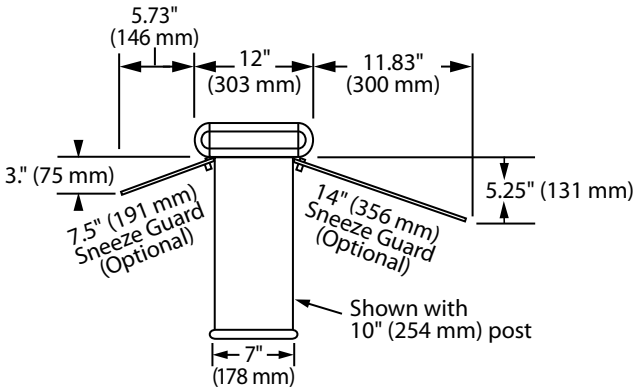

SIDE VIEW

SPECIFICATIONS

Glo-Ray® Designer Infrared Strip Heaters (without Non-Adjustable Stands)

Standard Watt					High Watt					Both Models
Model ❀	Volts single phase	Watt	Amps	Approx. Ship Weight■	Model	Volts single phase	Watt	Amps	Approx. Ship Weight■	Width x Depth x Height
GR2A-18	120	250	2.1	19 lbs. (9 kg)	GR2AH-18	120	350	2.9	28 lbs. (13 kg)	21.5" x 11.9" x 3.5" (546 x 303 x 89 mm)
	208		1.2			208		1.7		
	240		1.0			240		1.5		
	220-230 (CE)‡	250-273	1.1-1.2			220-230 (CE)‡	350-383	1.6-1.7		
	230-240 (CE)‡	230-250	1.0-1.0			230-240 (CE)‡	321-350	1.4-1.5		
GR2A-24	120	350	2.9	20 lbs. (10 kg.)	GR2AH-24	120	500	4.2	20 lbs. (10 kg.)	27.5" x 11.9" x 3.5" (699 x 303 x 89 mm)
	208		1.7			208		2.4		
	240		1.5			240		2.1		
	220-230 (CE)‡	350-383	1.6-1.7			220-230 (CE)‡	500-547	2.3-2.4		
	230-240 (CE)‡	321-350	1.4-1.5			230-240 (CE)‡	459-500	2.0-2.1		
GR2A-30	120	450	3.8	27 lbs. (13 kg.)	GR2AH-30	120	660	5.5	27 lbs. (13 kg.)	33.5" x 11.9" x 3.5" (851 x 303 x 89 mm)
	208		2.2			208		3.2		
	240		1.9			240		2.8		
	220-230 (CE)‡	450-492	2.1-2.2			220-230 (CE)‡	660-721	3.0-3.1		
	230-240 (CE)‡	413-450	1.8-1.9			230-240 (CE)‡	606-660	2.6-2.8		
GR2A-36	120	575	4.8	37 lbs. (17 kg.)	GR2AH-36	120	800	6.7	27 lbs. (13 kg.)	39.5" x 11.9" x 3.5" (1003 x 303 x 89 mm)
	208		2.8			208		3.8		
	240		2.4			240		3.3		
	220-230 (CE)‡	575-629	2.6-2.7			220-230 (CE)‡	800-874	3.6-3.8		
	230-240 (CE)‡	528-575	2.3-2.4			230-240 (CE)‡	735-800	3.2-3.3		
GR2A-42	120	675	5.6	38 lbs. (18 kg.)	GR2AH-42	120	950	7.9	34 lbs. (16 kg.)	45.5" x 11.9" x 3.5" (1156 x 303 x 89 mm)
	208		3.2			208		4.6		
	240		2.8			240		4.0		
	220-230 (CE)‡	675-738	3.1-3.2			220-230 (CE)‡	950-1038	4.3-4.5		
	230-240 (CE)‡	620-675	2.7-2.8			230-240 (CE)‡	872-950	3.8-4.0		
GR2A-48	120	800	6.7	43 lbs. (20 kg.)	GR2AH-48	120	1100	9.2	27 lbs. (13 kg.)	51.5" x 11.9" x 3.5" (1308 x 303 x 89 mm)
	208		3.8			208		5.3		
	240		3.3			240		4.6		
	220-230 (CE)‡	800-874	3.6-3.8			220-230 (CE)‡	1100-1202	5.0-5.2		
	230-240 (CE)‡	735-800	3.2-3.3			230-240 (CE)‡	1010-1100	4.4-4.6		
GR2A-54	120	925	7.7	43 lbs. (20 kg.)	GR2AH-54	120	1250	10.4	43 lbs. (20 kg.)	57.5" x 11.9" x 3.5" (1460 x 303 x 89 mm)
	208		4.4			208		6.0		
	240		3.9			240		5.2		
	220-230 (CE)‡	925-1011	4.2-4.4			220-230 (CE)‡	1250-1366	5.7-5.9		
	230-240 (CE)‡	849-925	3.7-3.9			230-240 (CE)‡	1148-1250	5.0-5.2		
GR2A-60	120	1050	8.8	40 lbs. (19 kg.)	GR2AH-60	120	1400	11.7	40 lbs. (19 kg.)	63.5" x 11.9" x 3.5" (1613 x 303 x 89 mm)
	208		5.0			208		6.7		
	240		4.4			240		5.8		
	220-230 (CE)‡	1050-1148	4.8-5.0			220-230 (CE)‡	1400-1530	6.4-6.7		
	230-240 (CE)‡	964-1050	4.2-4.4			230-240 (CE)‡	1286-1400	5.6-5.8		

❀ When no color is specified, color inset panels and corner caps will be black.
■ Shipping weight includes packaging, and does not include RMB, must order an RMB.
‡ CE approved units for 220–230V utilize a 220V heating system; 230–240V CE units utilize a 240V heating system.

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350
www.hatcocorp.com | customerservice@hatcocorp.com | Find a Hatco Rep | Image Library | Document Library

Glo-Ray® *Designer* Infrared Strip Heaters

Models: GR2A-18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84
GR2AH -18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84

SPECIFICATIONS

Glo-Ray® Designer Infrared Strip Heaters (without Non-Adjustable Stands)

Standard Watt					High Watt					Both Models
Model [1]	Volts single phase	Watt	Amps	Approx. Ship Weight[2]	Model	Volts single phase	Watt	Amps	Approx. Ship Weight[2]	Width x Depth x Height
GR2A-66	120	1160	9.7	40 lbs. (19 kg.)	GR2AH-66[3]	120	1560	13.0	40 lbs. (19 kg.)	69.5" x 11.9" x 3.5" (1765 x 303 x 89 mm)
	208		5.6			208		7.5		
	240		4.8			240		6.5		
	220-230 (CE)‡	1160-1268	5.3-5.5			220-230 (CE)‡	1560-1705	7.1-7.4		
	230-240 (CE)‡	1065-1160	4.6-4.8			230-240 (CE)‡	1433-1560	6.2-6.5		
GR2A-72	120	1275	10.6	42 lbs. (20 kg.)	GR2AH-72[3]	120	1725	14.4	42 lbs. (20 kg.)	75.5" x 11.9" x 3.5" (1918 x 303 x 89 mm)
	208		6.1			208		8.3		
	240		5.3			240		7.2		
	220-230 (CE)‡	1275-1394	5.8-6.1			220-230 (CE)‡	1725-18856	7.8-8.2		
	230-240 (CE)‡	1171-1275	5.1-5.3			230-240 (CE)‡	1584-1725	6.9-7.2		
GR2A-84[3]	120	1500	12.5	46 lbs. (21 kg.)	GR2AH-84[4]	120	1900	15.8	46 lbs. (21 kg.)	87.5" x 11.9" x 3.5" (2223 x 303 x 89 mm)
	208		7.2			208	2050	9.9		
	240		6.3			240	2050	8.5		
	220-230 (CE)‡	1500-1640	6.8-7.1			220-230 (CE)‡	2050-2241	9.3-9.7		
	230-240 (CE)‡	1377-1500	6.0-6.3			230-240 (CE)‡	1883-2050	8.2-8.5		

[1] When no color is specified, color inset panels and corner caps will be black.
[2] Shipping weight includes packaging, and does not include RMB, must order an RMB.
‡ CE approved units for 220–230V utilize a 220V heating system; 230–240V CE units utilize a 240V heating system.
[3] When using an infinite control with 120 volt model, additional switch(es) and tandem (end-to-end) elements required.
[4] 120V models require additional switches and tandem (end-to-end) elements that December be individually controlled.

SWITCH LOCATION

Remote only.

LEADS

5' (1524 mm) through 0.5" (13 mm) conduit in Stand cavity is standard

ELEMENT HEIGHT REQUIREMENTS

(Refer to the Installation section of the Manual on the Hatco website)

Standard Watt:
Height: 8"-12" (203-305 mm)
Target Width: 12"-14" (305-356 mm)

High Watt:
Height: 11"-14" (279-356 mm)
Target Width: 14"-16" (356-406 mm)

REMOTE CONTROL ENCLOSURES

Must order one RMB control box per Strip Heater - If RMB2 is used, multiple warmers can be controlled from one box.

Click here to go to the Choose Remote Box Configurator (RMB Picker)
or follow this file path: www.hatcocorp.com > Resources > Choose Remote Box

Model	Width	Switches
RMB-3	6" (150 mm)	1 infinite or 1 toggle
RMB-7	9.375" (239 mm)	1 infinite with pilot light
RMB-14	14.375" (366 mm)	2 infinites with pilot light
RMB2-1R	11" (279 mm)	1 toggle, 1 infinite, 1 relay, 1 indicator light
RMB2-2R	14" (356 mm)	1 toggle, 1 infinite, 2 relays, 1 indicator light



RMB-14E
with infinite controls

RMB-7C
with infinite controls

PRODUCT SPECS

Designer Infrared Foodwarmers

The *Designer* Infrared Foodwarmer shall be a Glo-Ray®, manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A. The foodwarmer shall be a Glo-Ray model ... , rated at ... watts, ... volts, single phase and be ... inches (millimeters) in overall width. The Glo-Ray shall consist of an aluminum housing and include as standard equipment 14" (356 mm) *Designer* Stands. The infrared heating element shall be tubular metal sheathed. The foodwarmer shall be factory assembled ready for electrical installation.

Options shall include *Designer* Stands in various sizes (available in *Designer* Colors), Overhead Mounts (available in *Designer* Colors), dark gray Corner Caps, Sneeze Guards, no Control, no Bulb, extra Lamps, Extended Electrical Power Leads and Remote Control Enclosure. *Designer* Colors shall be anti-microbial paint.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).