Project _____

Item # _____


Quantity _____

Glo-Ray® *Designer Dual* Infrared Aluminium Strip Heaters with Lights

Models:

GR2AL -18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D

GR2AHL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D

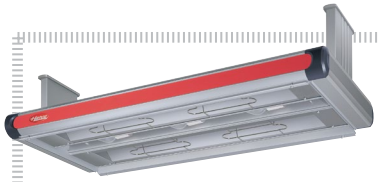

GR2AHL-36D with optional overhead mounts and optional Designer color Inset Panels (black Corner Caps Standard)



GR2AL-48D with Standard Designer non-adjustable stands and optional Designer color Inset Panels (black Corner Caps Standard)

Glo-Ray® *Designer* Aluminum Dual Infrared Strip Heaters allow side-by-side mounting of two warmers to provide a deeper holding area, keeping hot food at optimum serving temperatures. The lights illuminate and complement food perfectly. These modern front-of-the-house warmers have 3" spacers Standard with optional 6" spacers. Units are available in *Designer* colors to match most décors.

Standard features

- Pre-focused heat maintains safe serving temperatures longer without continuing to cook the food
- Sturdy continuous aluminum housings eliminate sagging
- Widths from 21.5" to 87.5" (546 X 2223 mm)
- 14" (356 mm) *Designer* non-adjustable Stands Standard
- Available in a variety of models, configurations, colors and accessories to provide unlimited flexibility
- Designer colors and inset panels allow the unit to match surrounding décor ⊗
- Black corner caps and inset panels standard
- Standard coated shatter-resistant incandescent or optional halogen lights enhance product displays while safeguarding food from bulb breakage
- Optional sneeze guards
- Remote control installation is required - must chose RMB
- Additional reflector styles and lower wattage elements available, consult factory for more information

NOTE: Install Remote Box outside Heat Zone or damage will occur.

Options (available at time of purchase only)

Housing
☐15" (381 mm) ☐18" (457 mm)
Designer Color for Housing – Aluminum finish Standard ⊗
☐Warm Red ☐Black ☐Gray Granite ☐White Granite
☐Navy Blue ☐Hunter Green ☐Antique Copper

Inset Panel *Designer* Color – Black Standard ⊗
☐Warm Red ☐Black ☐Gray Granite ☐White Granite
☐Navy Blue ☐Hunter Green ☐Antique Copper

☐Dark Gray Corner Caps – Black Standard ⊗

☐No Control – Requires selection of RMB2-xx control

Remote Box in *Designer* Color – Aluminum finish Standard ⊗
☐Warm Red ☐Black ☐Gray Granite ☐White Granite
☐Navy Blue ☐Hunter Green ☐Antique Copper

Sneeze Guards
☐7.5" (191 mm) – One Side ☐7.5" (191 mm) – Two Sides
☐14" (356 mm) – One Side ☐14" (356 mm) – Two Sides

Designer Non-Adjustable Stands – 14" (356 mm) *Designer* Stand Standard
☐10" (254 mm) ☐12" (305 mm) ☐16" (406 mm)
Designer Color – Aluminum finish Standard ⊗
☐Warm Red ☐Black ☐Gray Granite ☐White Granite
☐Navy Blue ☐Hunter Green ☐Antique Copper

☐Overhead Mounts 4" (102 mm) in lieu of Standard 14" (356 mm) *Designer* Stands
Designer Color – Aluminum finish Standard ⊗
☐Warm Red ☐Black ☐Gray Granite ☐White Granite
☐Navy Blue ☐Hunter Green ☐Antique Copper

☐60 Watt Halogen Bulb in lieu of standard Display Light

☐No Bulbs

☐Extra Lamps – Installed (max. two per ft. less one – one per ft. is standard)

Extended Power (Electrical) Leads
☐1'-5' (305-1525 mm) ☐6'-10' (1829-3048 mm)
☐11'-15' (3352-4572 mm) ☐16'-20' (4877-6096 mm)

Accessories

Chef LED Light Bulb – Bulbs must be rotated down
120V
☐3000K Warm halogen ☐4000K Cool fluorescent
230V – CE for input voltages above 200V
☐3000K Warm halogen ☐4000K Cool fluorescent

⊗Non-standard color are non-returnable

ANSI/NSF 4

MADE IN THE USA

For operation, location and safety information, please refer to the Installation and Operating Manual.


HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350

www.hatcocorp.com | customerservice@hatcocorp.com | Find a Hatco Rep | Image Library | Document Library


Glo-Ray® Infrared *Designer* Dual Aluminum Strip Heaters with Lights

Models: GR2AL -18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D
GR2AHL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D

GR2AL-D and GR2AHL-D

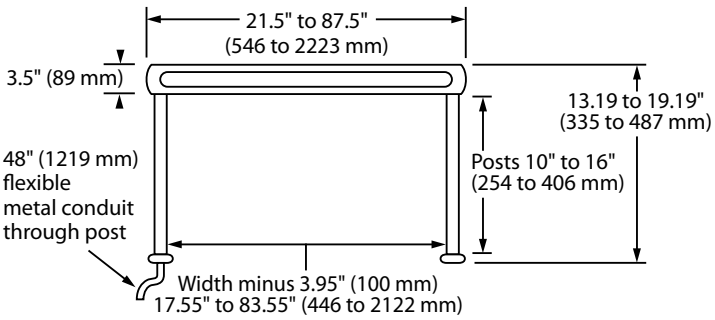

FRONT VIEW

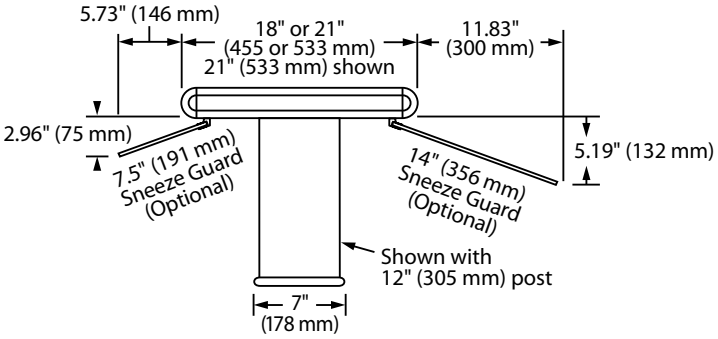

SIDE VIEW

SPECIFICATIONS

Glo-Ray® Infrared *Designer* Aluminum Strip Heaters with Lights

Dimensions (without Non-Adjustable Stands)
21.5" - 87.5" W x 18.0"-21.0"" D x 3.5" H (546 - 2223 x 455-533 mm x 89 mm)

The shaded areas contain electrical information for International models

Standard Watt					High Watt					Both Models	
Model	**Volts** single phase	**Watt**	**Amps**	**Approx. Ship Weight**☗	**Model**	**Volts** single phase	**Watt**	**Amps**	**Approx. Ship Weight**☗	**Number of Bulbs**	**Width**
GR2AL-18D	120	620	5.2	28 lbs. (13 kg)	GR2AHL-18D	120	820	6.8	28 lbs. (13 kg)	2	21.5" (546 mm)
	120/208		3.4			120/208		4.4			
	120/240		3.1			120/240		3.9			
	220-230 (CE)‡	600-656	2.7-2.9			220-230 (CE)‡	801-876	3.6-3.8			
	230-240 (CE)‡	569-620	2.5-2.6			230-240 (CE)‡	752-820	3.3-3.4			
GR2AL-24D	120	820	6.8	32 lbs. (15 kg.)	GR2AHL-24D	120	1120	9.3	32 lbs. (15 kg.)	2	27.5" (699 mm)
	120/208		4.4			120/208		5.8			
	120/240		3.9			120/240		5.2			
	220-230 (CE)‡	801-876	3.6-3.8			220-230 (CE)‡	1101-1204	5.0-5.2			
	230-240 (CE)‡	752-820	3.3-3.4			230-240 (CE)‡	1028-1120	4.5-4.7			
GR2AL-30D	120	1020	8.5	35 lbs. (16 kg.)	GR2AHL-30D	120	1440	12.0	35 lbs. (16 kg.)	2	33.5" (851 mm)
	208		5.3			208		7.3			
	240		4.8			240		6.5			
	220-230 (CE)‡	1001-1094	4.6-4.8			220-230 (CE)‡	1421-1552	6.5-6.7			
	230-240 (CE)‡	936-1020	4.1-4.3			230-240 (CE)‡	1322-1440	5.7-6.0			
GR2AL-36D	120	1330	11.1	40 lbs. (19 kg.)	GR2AHL-36D	120	1780	14.8	40 lbs. (19 kg.)	3	39.5" (1003 mm)
	120/208		7.0			120/208		9.2			
	120/240		6.3			120/240		8.2			
	220-230 (CE)‡	1301-1423	5.9-6.2			220-230 (CE)‡	1751-1913	8.0-8.3			
	230-240 (CE)‡	1221-1330	5.3-5.5			230-240 (CE)‡	1635-1780	7.1-7.4			
GR2AL-42D	120	1530	12.8	46 lbs. (21 kg.)	GR2AHL-42D	120♣	2080	17.3	46 lbs. (21 kg.)	3	45.5" (1156 mm)
	120/208		8.0			120/208		10.6			
	120/240		7.1			120/240		9.4			
	220-230 (CE)‡	1501-1641	6.8-7.1			220-230 (CE)‡	2051-2241	9.3-9.7			
	230-240 (CE)‡	1405-1530	6.1-6.4			230-240 (CE)‡	1911-2080	8.3-8.7			
GR2AL-48D	120	1840	15.3	47 lbs. (22 kg.)	GR2AHL-48D	120♣	2440	20.3	47 lbs. (22 kg.)	4	51.5" (1308 mm)
	120/208		9.7			120/208		12.6			
	120/240		8.7			120/240		11.2			
	220-230 (CE)‡	1802-1969	8.2-8.6			220-230 (CE)‡	2402-2625	10.9-11.4			
	230-240 (CE)‡	1690-1840	7.3-7.7			230-240 (CE)‡	2240-2440	9.7-10.2			
GR2AL-54D	120♣	2090	17.4	50 lbs. (23 kg.)	GR2AHL-54D	120♣	2740	22.8	50 lbs. (23 kg.)	4	57.5" (1460 mm)
	120/208		10.9			120/208		14.0			
	120/240		9.7			120/240		12.4			
	220-230 (CE)‡	2052-2243	9.3-9.7			220-230 (CE)‡	2702-2953	12.3-12.8			
	230-240 (CE)‡	1920-2090	8.3-8.7			230-240 (CE)‡	2516-2740	10.9-11.4			

♣ Must order with an RMB2 for Canada.
☗ Shipping weight includes packaging, and does not include RMB (Remote Box), must order an RMB.
‡ CE approved units for 220–230V utilize a 220V heating system; 230–240V CE units utilize a 240V heating system.
↗ 120 volt models with infinite controls not available.
NOTE: Units rated for 120/208 or 120/240 volt are manufactured with a 120 volt circuit for the incandescent lights and a 208 or 240 volt circuit for the heating element(s).

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350
www.hatcocorp.com | customerservice@hatcocorp.com | Find a Hatco Rep | Image Library | Document Library

Glo-Ray® Infrared *Designer* Dual Aluminum Strip Heaters with Lights

Models: GR2AL -18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D
GR2AHL-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D

SPECIFICATIONS

Glo-Ray® Infrared *Designer* Aluminum Strip Heaters with Lights

Dimensions (without Non-Adjustable Stands)
21.5" - 87.5" W x 18.0"-21.0"" D x 3.5" H (546 - 2223 mm x 455-533 mm x 89 mm)

The shaded areas contain electrical information for International models

Standard Watt					High Watt					Both Models	
Model	Volts single phase	Watt	Amps	Approx. Ship Weight	Model	Volts single phase	Watt	Amps	Approx. Ship Weight	Number of Bulbs	Width
GR2AL-60D	120♣	2400	20	55 lbs. (25 kg.)	GR2AHL-60D	120♣	3100	25.8	55 lbs. (25 kg.)	5	63.5" (1613 mm)
	120/208		12.6			120/208		16.0			
	120/240		11.3			120/240		14.2			
	220-230 (CE)‡	2352-2572	10.7-11.2			220-230 (CE)‡	3050-3336	13.9-14.5			
	230-240 (CE)‡	2204-2400	9.6-10.0			230-240 (CE)‡	2848-3100	12.4-12.9			
GR2AL-66D	120♣	2620	21.8	67 lbs. (31 kg.)	GR2AHL-66D↙	120♣	3420	28.5	67 lbs. (31 kg.)	5	69.5" (1765 mm)
	120/208		13.7			120/208		17.5			
	120/240		12.2			120/240		15.5			
	220-230 (CE)‡	2572-2812	11.7-12.2			220-230 (CE)‡	3372-3686	15.3-16.0			
	230-240 (CE)‡	2406-2620	10.5-11.0			230-240 (CE)‡	3142-3420	13.7-14.3			
GR2AL-72D	120♣	2910	24.3	75 lbs. (35 kg.)	GR2AHL-72D↙◎	120♣	3810	31.8	75 lbs. (35 kg.)	6	75.5" (1918 mm)
	120/208		15.3			120/208		19.6			
	120/240		13.6			120/240		17.4			
	220-230 (CE)‡	2853-3119	13.0-13.5			220-230	3753-4101	17.1-17.8			
	230-240 (CE)‡	2673-2910	11.6-12.1			230-240 (CE)‡	3499-3810	15.2-15.9			
GR2AL-84D↙⚯	120♣	3420	28.5	82 lbs. (38 kg.)	GR2AHL-84D ⚯◎	–	–	–	82 lbs. (38 kg.)	7	87.5" (2223 mm)
	120/208		17.9			120/208	4520	23.2			
	120/240		16.0			120/240		20.6			
	220-230 (CE)‡	3353-3666	15.2-15.9			220-230	4453-4868	20.2-21.2			
	230-240 (CE)‡	3142-3420	13.7-14.3			230-240	4152-4520	18.1-18.8			

♣ Must order with an RMB2 for Canada.
Shipping weight includes packaging, and does not include RMB (Remote Box), must order an RMB.
‡ CE approved units for 220–230V utilize a 220V heating system; 230–240V CE units utilize a 240V heating system.
↙ 120 volt models with infinite controls not available.
⚯ 120 volt models contain tandem (end-to-end) elements that may be individually controlled.
◎ Remote Control Box required

NOTE: Units rated for 120/208 or 120/240 volt are manufactured with a 120 volt circuit for the incandescent lights and a 208 or 240 volt circuit for the heating element(s).

SWITCH LOCATION
Remote only

TOGGLE SWITCH
Amps: Max. 15 amps

INFINITE SWITCH
Max. 12.2 amps

LEADS
5' (1524 mm) through 1/2" conduit in Stand cavity is standard

ELEMENT HEIGHT REQUIREMENTS
(Refer to the Installation section of the Manual on the Hatco website)
or follow this file path: www.hatcocorp.com > Resources > Choose Remote Box

With 3" (76 mm) or 6" (152 mm) Spacer

Standard Watt
Height: 10"-14" (254-356 mm)
Target Width: 18" (457 mm)

High Watt
Height: 14"-18" (356-457 mm)
Target Width: 24" (610 mm)

REMOTE CONTROL ENCLOSURES
Must order one RMB control box per Strip Heater - If RMB2 is used, multiple warmers can be controlled from one box.
Click here to go to the Choose Remote Box Configurator (RMB Picker)
or follow this file path: www.hatcocorp.com > Resources > Choose Remote Box

Model (Series)	Width	Switches
RMB-3	6" (150 mm)	2 toggles
RMB-7	9.375" (239 mm)	2 toggles with indicator lights or 1 toggle, 1 infinite and indicator light
RMB-14	14.375" (366 mm)	2 Infinites with pilot lights

PRODUCT SPECS

Designer Infrared *Designer* Dual Aluminum Foodwarmers with Lights

The Infrared *Designer* Dual Aluminum Foodwarmer with Lights shall be a Glo-Ray®, manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A. The foodwarmer shall be a Glo-Ray model ... , rated at ... watts, ... volts, single phase and be ... inches (millimeters) in overall width. The Glo-Ray shall consist of an aluminum housing and include as standard equipment 14" (356 mm) *Designer* Stands. The infrared heating element shall be tubular metal sheathed. The foodwarmer shall be factory assembled ready for electrical installation.

Options shall include *Designer* Color Housing, *Designer* Color Inset Panel, *Designer* non-adjustable Stands in various sizes (available in *Designer* Colors), Overhead Mounts (available in *Designer* Colors), dark gray corner caps, Sneeze Guards, no Control, Halogen Bulb(s), no Bulbs, Extra Lamps, Extended Electrical Power Leads. All *Designer* Colors are anti-microbial paint.

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).