Project _____

Item # _____

Quantity _____

Flav-R 2-Go® Built-In Outdoor Locker System

Models: F2GBOF-7, -11
F2GBOB-7, -11

Boost efficiency and elevate the pickup experience with the Hatco Flav-R 2-Go® Built-In Outdoor Locker System. Featuring separate lockers for interior loading and exterior pickup, this innovative solution keeps orders moving and operations flowing. It streamlines order handoff by keeping ambient or hot meals secure, organized and ready for pickup. Staff load orders directly from the kitchen, while customers and delivery drivers pick them up outside — quickly, contact-free and without stepping indoors.



F2GBOF-7
shown from exterior customer side, mounted into a building wall.



F2GBOB-7
Heated model shown from interior operator side with optional controls.

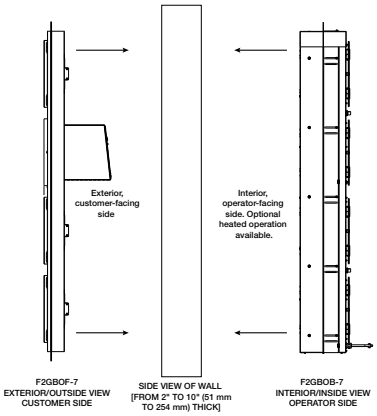

PLEASE SEE PAGE 4 FOR COMPLETE LOCKER SYSTEM INFORMATION.

Standard features

- Front and back lockers are sold separately for flexible pricing and installation options, and are designed to seamlessly join together to form a complete locker system
- Available in configurations of 7 or 11 cubbies to suit your needs
- Ambient holding is standard. Heated operation is available for F2GBOB models (interior operator side) only; heated models include individual thermostatic temperature controls for each cubby and support a temperature range from ambient to 200°F (93°C)
- Customer-facing touchscreen is rated for outdoor use, featuring a brighter display, thicker glass and anti-glare film
- 10" (257 mm) touchscreens on both customer and operator sides allow for quick, easy access
- Flashing LED lights will indicate the correct cubby for order pickup
- F2GBOF models (exterior customer side) feature insulated front doors, which shield against outdoor elements and maintain optimum temperatures in each cubby
- F2GBOB models (interior operator side) feature optional screen-printed glass doors for added privacy
- Adjustable mounting flanges accommodate wall thicknesses from 2" to 10" (51 to 254 mm)
- Heavy-duty outdoor-rated rotary latches, designed to meet IP65 rating, secure each cubby individually
- ADA compliant: Touchscreen height must be 48" (1219 mm) or lower (dependant on installation specifications)

NOTE: All Flav-R 2-Go Locker System models are custom by nature and are non-returnable.

For operation, location and safety information, please refer to the Installation and Operating Manual.

Options (available at time of purchase only)

☐ Heated operation for F2GBOB-7 (Interior operator side)

☐ Heated operation for F2GBOB-11 (Interior operator side)

Door Color■ [F2GBOF Models (Exterior customer side) Only] – Non-standard colors are non-returnable – Stainless Steel Standard –
☐ Black

Glass Doors [F2GBOB Models (Interior operator side) Only]
☐ F2GBOB-7 (Interior operator side)
☐ F2GBOB-11 (Interior operator side)

Touchscreen Location

F2GBOF-7, F2GBOB-7 (Standard location: row 3, column 2)
☐ Row 2, column 2

F2GBOF-11, F2GBOB-11 (Standard location: row 3, column 2)
☐ Row 2, column 2

Cord Location (F2GBOB Heated models only)

☐ Bottom left

☐ Bottom right

ANSI/NSF 4

MADE IN THE USA

HATCO CORPORATION | P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. | (414) 671-6350

www.hatcocorp.com | customerservice@hatcocorp.com | Find a Hatco Rep | Image Library | Document Library

Flav-R 2-Go® Built-In Outdoor Locker System

Models: F2GBOF-7, -11 F2GBOB-7, -11

F2GBOF-7

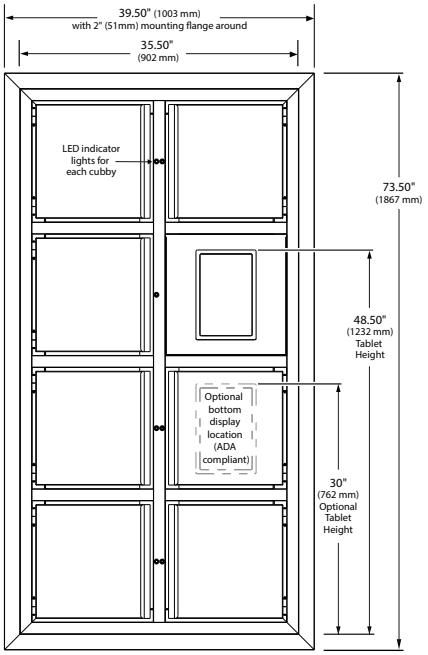

F2GBOF-7
EXTERIOR/OUTSIDE VIEW
CUSTOMER SIDE

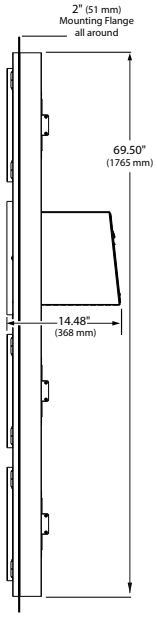

F2GBOF-7
EXTERIOR/OUTSIDE SIDE VIEW
CUSTOMER SIDE

F2GBOB-7

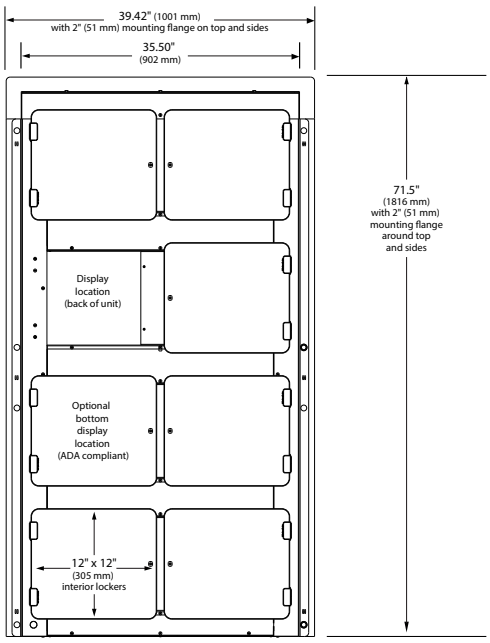

F2GBOB-7 (Standard Ambient Operation)
INTERIOR/INSIDE VIEW
OPERATOR SIDE

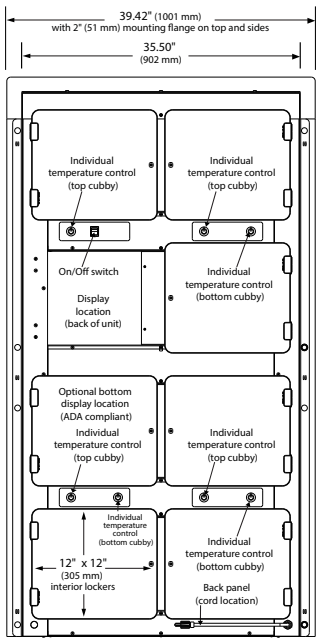

F2GBOB-7 (Optional Heated Operator)
INTERIOR/INSIDE VIEW
OPERATOR SIDE

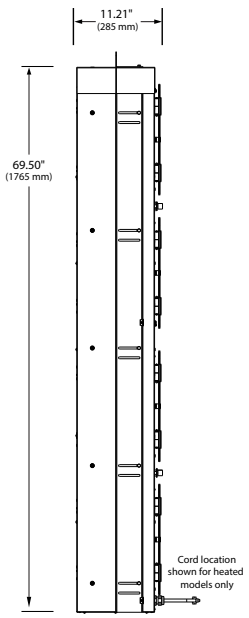

F2GBOB-7
INTERIOR/INSIDE SIDE VIEW
OPERATOR SIDE

Flav-R 2-Go® Built-In Outdoor Locker System

Models: F2GBOF-7, -11 F2GBOB-7, -11

F2GBOF-11

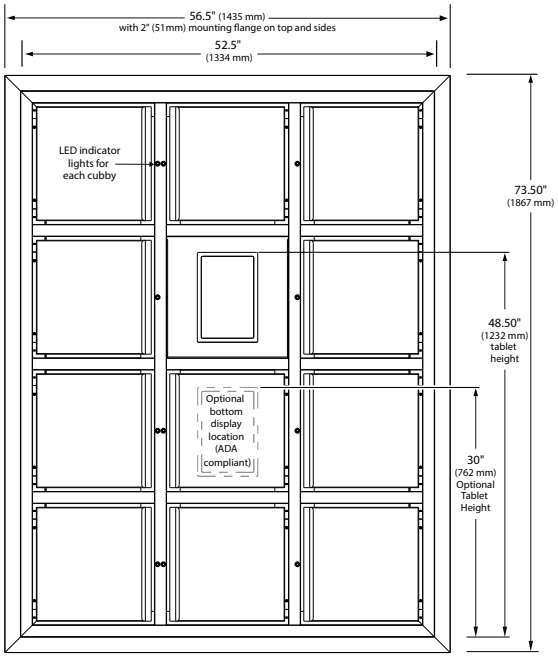

F2GBOF-11
EXTERIOR/OUTSIDE VIEW
CUSTOMER SIDE

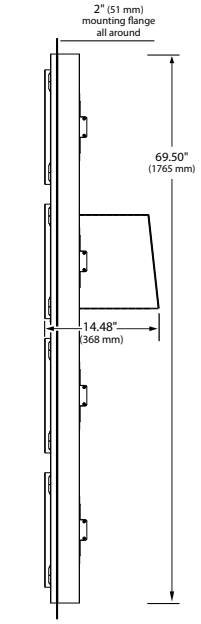

F2GBOF-11
EXTERIOR/OUTSIDE SIDE VIEW
CUSTOMER SIDE

F2GBOB-11

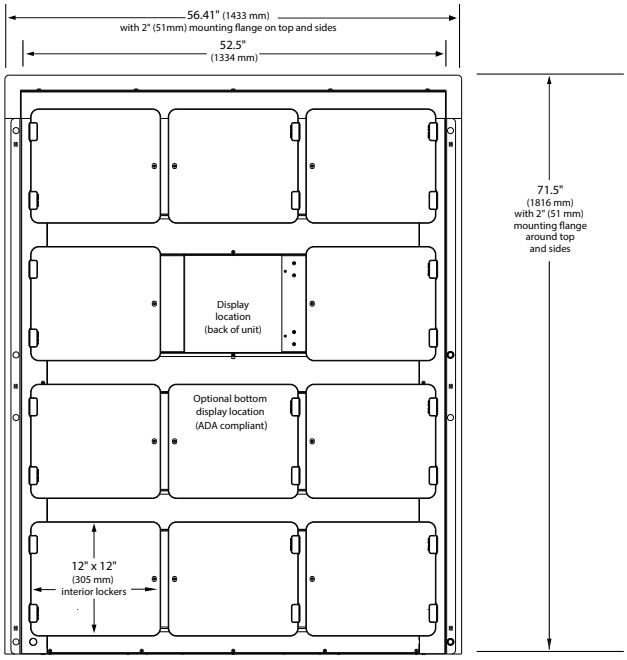

F2GBOB-11 (Standard Ambient Operation)
INTERIOR/INSIDE VIEW
OPERATOR SIDE

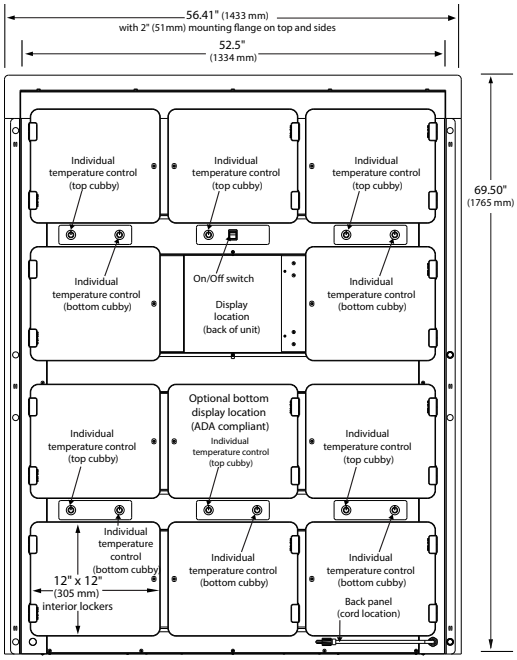

F2GBOB-11 (Optional Heated Operation)
INTERIOR/INSIDE VIEW
OPERATOR SIDE

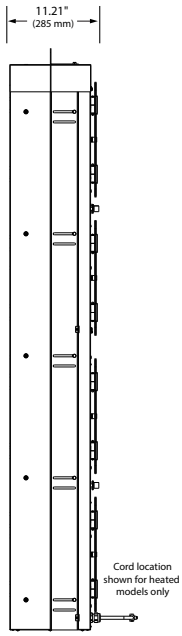

F2GBOB-11
INTERIOR/INSIDE SIDE VIEW
OPERATOR SIDE

Flav-R 2-Go® Built-In Outdoor Locker System

Models: F2GBOF-7, -11 F2GBOB-7, -11

HOW THE SYSTEM WORKS

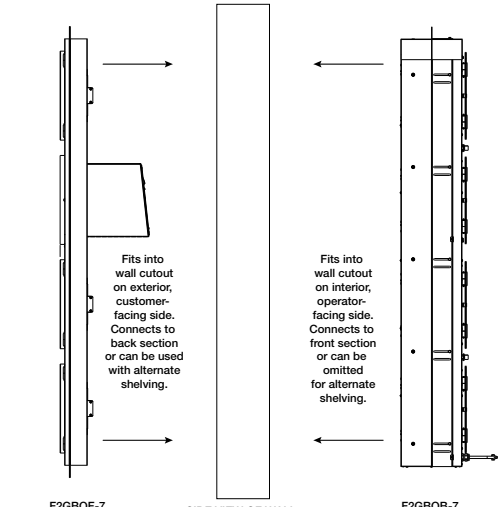

SPECIFICATIONS

Flav-R 2-Go® Ambient Built-In Outdoor Locker System (Front and Back Models)

Model	Model Dimensions (W x D x H)	Rough Wall Opening Dimensions (W x H)	Number of Lockers	Internal Locker Dimensions (W x D x H)↔	Volts	Watts	Amps	Plug
F2GBOF-7	39.5" x 14.5" x 73.5" (1003 x 368 x 1867 mm)	36" x 70" (914 x 1778 mm)	7 lockers	12" x 12" x 12" (305 x 305 x 305 mm)	12 VDC	15.6	1.3	NEMA 1-15P **POWER SUPPLY**
F2GBOB-7	39.42" x 14.5" x 69.5" (1001 x 368 x 1765 mm)	36" x 70" (914 x 1778 mm)	7 lockers	12" x 12" x 12" (305 x 305 x 305 mm)	N/A	N/A	N/A	N/A
F2GBOF-11	56.5" x 14.5" x 73.5" (1435 x 368 x 1867 mm)	53" x 70" (1346 x 1778 mm)	11 lockers	12" x 12" x 12" (305 x 305 x 305 mm)	12 VDC	36	3.0	NEMA 1-15P **POWER SUPPLY**
F2GBOB-11	56.42" x 14.5" x 69.5" (1435 x 368 x 1765 mm)	53" x 70" (1346 x 1778 mm)	11 lockers	12" x 12" x 12" (305 x 305 x 305 mm)	N/A	N/A	N/A	N/A

Flav-R 2-Go® Built-In Outdoor Locker System with Optional Heated Operation (Back Models only)

Model	Model Dimensions (W x D x H)	Rough Wall Opening Dimensions (W x H)	Number of Lockers	Internal Locker Dimensions (W x D x H)↔	Volts	Watts	Amps	Plug
F2GBOB-7	39.42" x 14.5" x 69.5" (1001 x 368 x 1765 mm)	36" x 70" (914 x 1778 mm)	7 lockers	12" x 12" x 12" (305 x 305 x 305 mm)	120	770	6.4	NEMA 5-15P
F2GBOB-11	56.42" x 14.5" x 69.5" (1435 x 368 x 1765 mm)	53" x 70" (1346 x 1778 mm)	11 lockers	12" x 12" x 12" (305 x 305 x 305 mm)	120	1210	10.1	

↔ When both units are together.

CORD LOCATION

Bottom left corner — F2GBOB models (interior, operator side) with optional heated operation ONLY.

PLUG CONFIGURATIONS

NEMA 1-15P



POWER SUPPLY

NEMA 5-15P



PRODUCT SPECS

Flav-R 2-Go® Built-In Outdoor Locker System

The Outdoor Locker System shall be a Flav-R 2-Go® Model … , rated at … volts, and … watts, by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

The lockers shall consist of outdoor-rated rotary latches, 10" (257 mm) touchscreen controller, insulated front doors, adjustable mounting flanges, a power On/Off switch, LED lighting, optional heated base (F2GBOB models only) and a 6' (1829 mm) cord with plug attached (F2GBOF models only).

Warranty consists of 24/7 parts and service assistance (U.S. and Canada only).